


A3D4-30XX

SMT 3-D Antenna

- For use in 3-D antenna applications
 - Keyless entry, Keyless go, RFID
- Compact design, low height
- “pick & place” surface
- Temperature range, -40 °C to 125 °C
- Other values available

Dash #	“L” @ 125kHz (mH) N1 / N2 / N3	“L” Tol. ± %	“Q” typ (125kHz) N1 / N2 / N3	“DCR” max (Ω) N1 / N2 / N3
-3001	2.47 / 2.47 / 2.47	3	25 / 25 / 25	125 / 125 / 160

Prel., 2/05

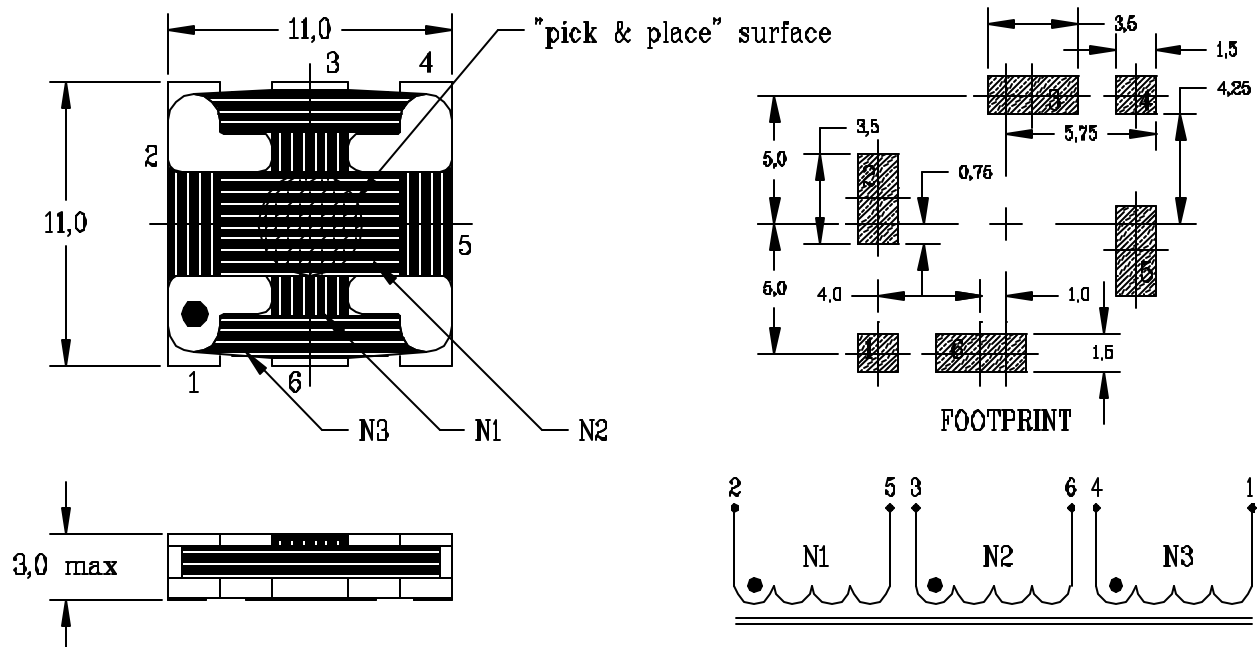

Dimensions in mm