


AS33-XXXX

SMT Antenna

- For use in antenna applications
- Use for data transmission 5-200 KHz
- Compact design, low height
- “pick & place” surface
- Inductance range, 10uH – 39mH
- Temperature range, -40 °C to 125 °C
- Energy storage, 1.5 uWsec.
- Packaging, 3200pcs, 24mm blisterpack
- Other values available

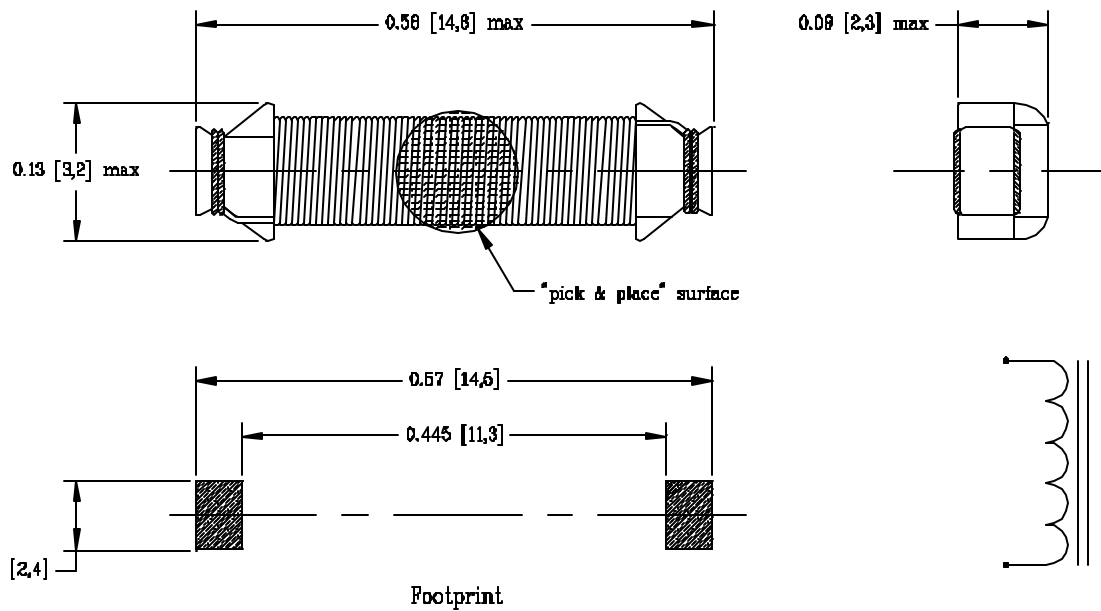

Dash #	“L” ± 10% (uH)	“SRF” min (MHz)	“DCR” max (mO)	“I” max (mA)
-0001	10	250	90	690
-0002	15			
-0003	22			
-0004	33			
-0005	47		550	320
-0007	68			
-0010	100		1.6 O	220
-0015	150			
-0022	220			
-0033	330		1.6 O	110
-0047	470			
-0068	680			
-0120	1.2 mH	700 KHz	6.5 O	50
-0400	4.0 mH	450 KHz	18 O	34
-0560	5.6 mH	400 KHz	27 O	30
-0820	8.2 mH	300 KHz	40 O	20
-3900	39 mH	150 KHz	175 O	11

Rev B, 2/05