


SML13-XXXX

Drum core, SMT power inductor

- Compact design, low height
- High current capacity
- Inductance range, 1.0uH – 1.0mH
- Temperature range, -40 °C to 85 °C
- Packaging, 700pcs, 24mm blisterpack
- Other values available

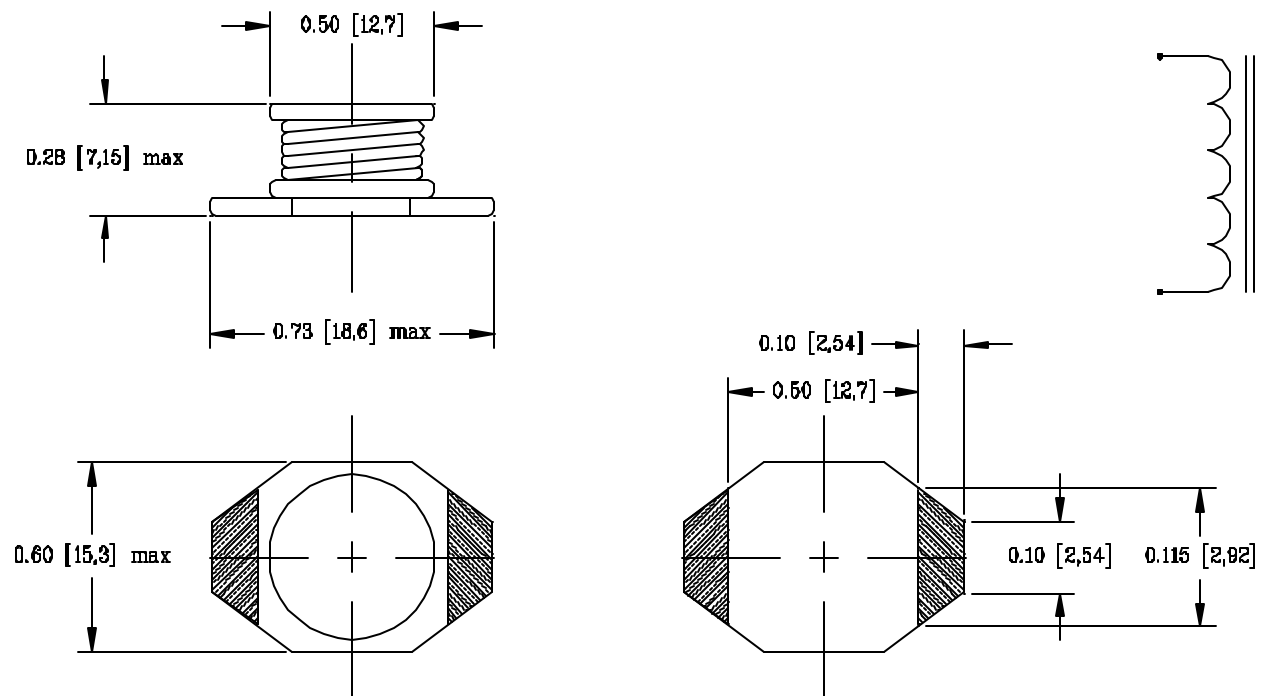

Dash #	“L” (uH)	Tol. (%)	“DCR” max (mO)	“I” max (A)
-0000	1.0	20	9	20.0
-0002	2.2	20	14	16.0
-0003	3.3	20	15	14.0
-0006	5.6	20	20	12.0
-0010	10	20	31	10.0
-0015	15	20	36	8.0
-0022	22	20	47	7.0
-0033	33	20	66	5.5
-0047	47	20	86	4.5
-0068	68	20	130	3.5
-0100	100	20	190	3.0
-0150	150	20	250	2.6
-0220	220	20	380	2.4
-0330	330	20	560	1.9
-0470	470	20	850	1.4
-0680	680	20	1.1 O	1.2
-1000	1000	20	1.8 O	1.0

Prel, 2/06