


SMR1-XXXX

Surface mount, rod core inductor

- Patented “pick & place” surface
- Compact design
- Temperature range, -40 °C to 125 °C
- Soldering temperature, 230 °C, 5 seconds
- Inductance test level, 100KHz
- Packaging, 300-4600pcs, 12mm blisterpack
- Leads tinned to seating plane

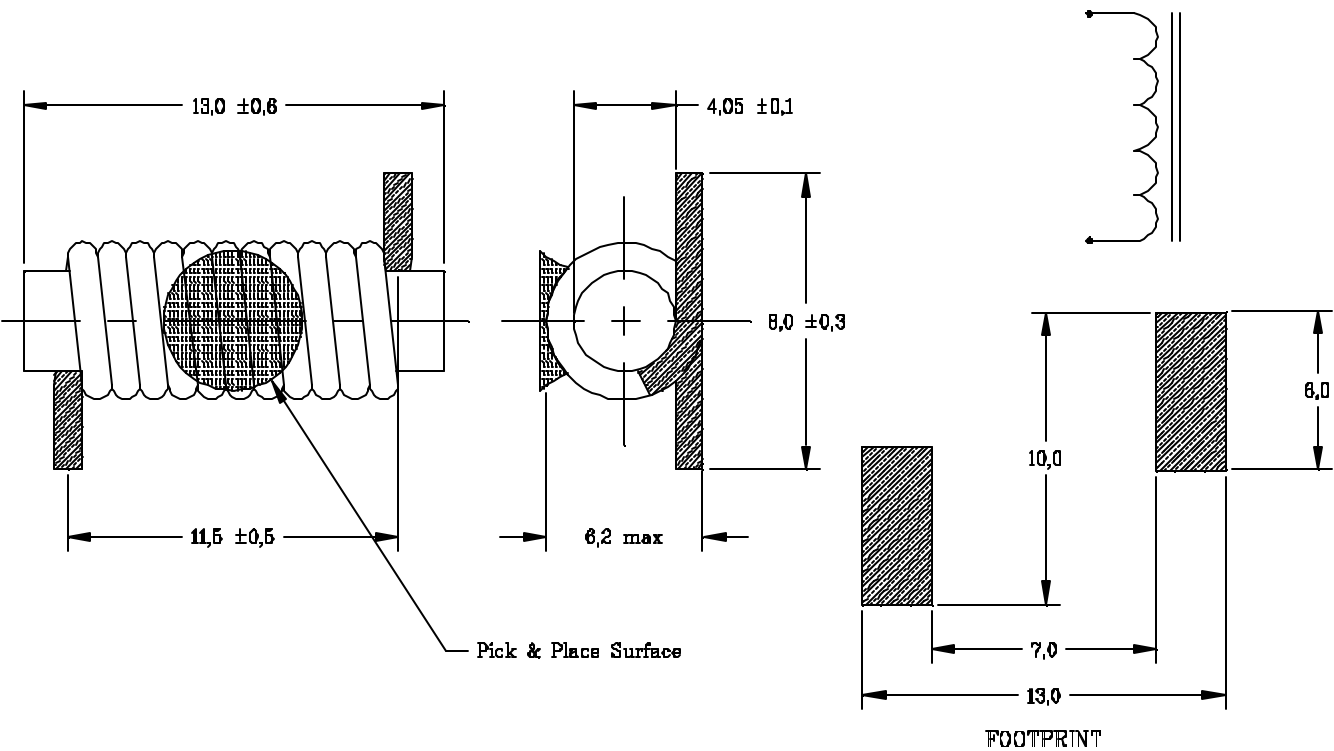

Dash #	“L” (uH)	Tol. ± %	“DCR” max (mW)	“I” max (A)
-0015	1.5	20	5.6	5.0
-0018	1.8	20	8.2	5.0
-0022	2.2	20	9.8	5.0
-0027	2.7	20	11.5	5.0
-0033	3.3	20	16.1	5.0
-0039	3.9	20	19.5	5.0
-0047	4.7	20	24.0	5.0