


SMS11-XXXX

SMT shielded inductor

- Inductor is magnetically shielded
- Compact design, low height
- Inductance range, 10uH – 10mH
- Temperature range, -40 °C to 130 °C
- Energy storage, 17 uWsec.
- Packaging, 700pcs, 24mm blisterpack
- Other values available

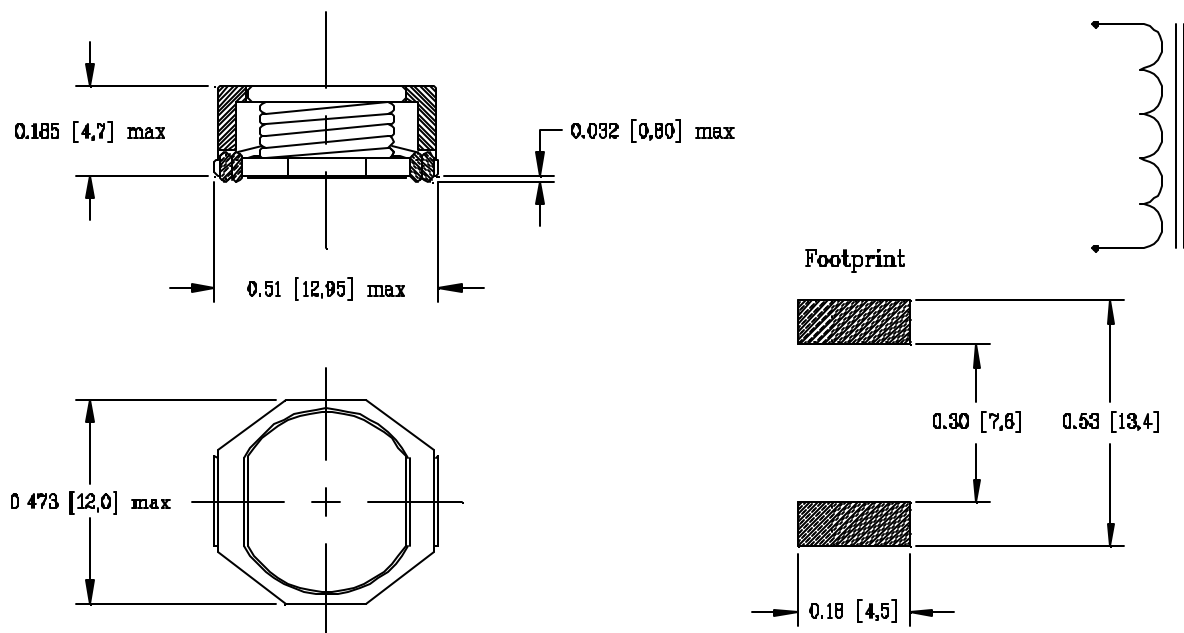

Dash#	“L” ± 25% (uH)	“SRF” min (MHz)	“DCR” max (mO)	“I” max (mA)
-0010	10	10	20	900
-0022	22	8.0	30	600
-0047	47	6.0	50	430
-0100	100	4.0	110	300
-0220	220	2.0	220	200
-0470	470	0.8	400	130
-1000	1.0 mH	0.6	680	85
-2200	2.2 mH	0.4	2.2 O	65
-4700	4.7 mH	0.3	3.7 O	45
-9999	10 mH	0.1	9.0 O	30

Rev A, 2/03