


SMS2-XXXX

SMT shielded inductor

- Inductor is magnetically shielded
- Compact design
- Inductance range, 10uH – 10mH
- Temperature range, -40 °C to 130 °C
- Energy storage, 3 uWsec.
- Packaging, 1700pcs, 12mm blisterpack
- Other values available

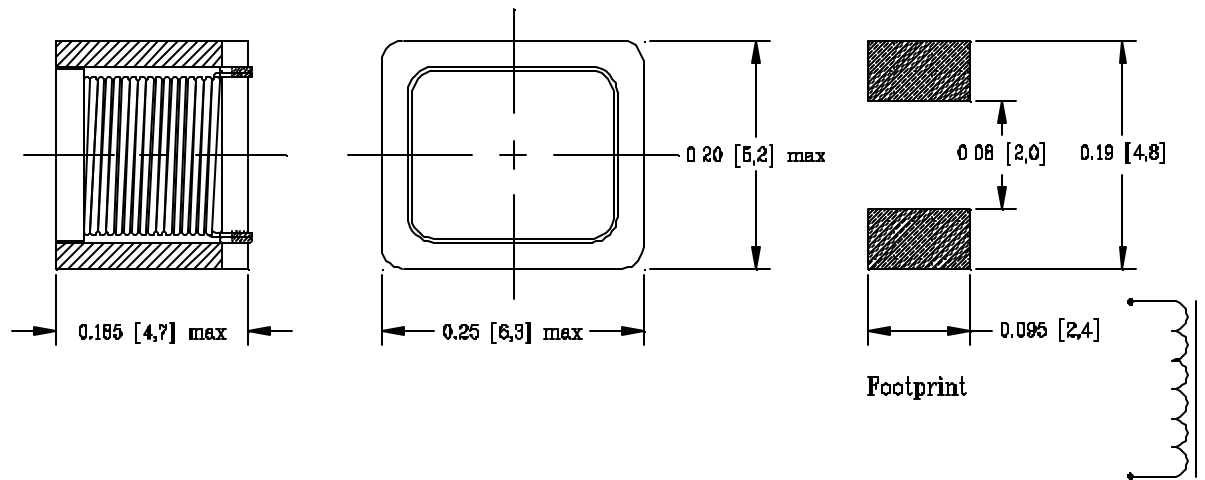

Dash #	“L” ± 20% (uH)	“DCR” max (mO)	“I” max (mA)
-0010	10	66	770
-0015	15		680
-0022	22	100	530
-0033	33		460
-0047	47	200	360
-0068	68		320
-0100	100	400	250
-0150	150	700	210
-0220	220	850	170
-0330	330		144
-0470	470	1.9 O	115
-0680	680		100
-1000	1.0 mH	4.2 O	80
-1500	1.5 mH	6.5 O	66
-2200	2.2 mH	9.6 O	53
-3300	3.3 mH	12.8 O	45
-4700	4.7 mH	18.0 O	36
-6800	6.8 mH	27.0 O	30
-9999	10 mH	43.0 O	25

Rev B, 2/05